


1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
84

PCT

(10) International Publication Number
WO 01/20372 A2

- [Continued on next page]*

(54) Title: ATHERMAL AND HIGH THROUGHPUT GRATINGS

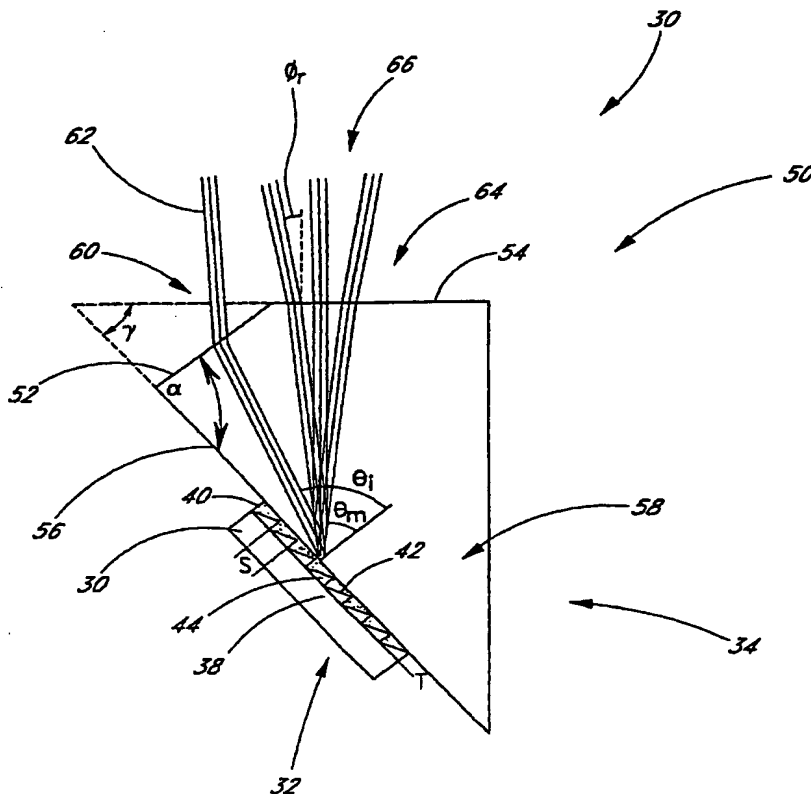

[Continued on next page]

WO 01/20372 A2



(84) **Designated States (regional):** European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *Without international search report and to be republished upon receipt of that report.*

(57) **Abstract:** A light dispersing device for dispersing a polychromatic input beam into a plurality of narrow-band output beams such that the output beams are directed in a wavelength dependent manner and such that the directions of the output beams are less affected by a change in temperature. The preferred embodiment of the device comprises a diffraction grating mounted to a surface of a prism. The grating and prism have dispersing characteristics that make the output of the device substantially insensitive to a change in temperature. In one embodiment, the device is adapted to reduce the angles between the input beam and the output beams at the grating, and thereby improve throughput efficiency.

ATHERMAL AND HIGH THROUGHPUT GRATINGS

Related Applications

5 This application claims the benefit of U.S. Provisional Application No. 60/153,913, filed on September 14, 1999 and is hereby incorporated by reference in its entirety.

Background of the Invention

Field of the Invention

10 The present invention relates to light dispersing devices and, in particular, relates to a thermally compensated light dispersing device utilizing a diffraction grating.

Description of the Related Art

15 Dispersing devices are often used in science and industry to separate beams of electromagnetic radiation, or light beams, according to wavelength. In particular, such devices are adapted to receive a polychromatic input light beam having a relatively large combined spectral bandwidth and convert the input beam into a plurality of constituent output light beams having relatively narrow bandwidths. The output beams exit the dispersing device with wavelength dependent directions so as to allow subsequent processing of individual wavelength components of the input beam.

20 One type of light dispersing device is a diffraction grating. The typical diffraction grating comprises a planar substrate and a relatively thin contoured layer formed on the

- 2 -

substrate such that a contoured outer surface of the contoured layer defines a plurality of narrow grooves or slits. In the case of a reflection type grating, the contoured layer is formed of material having a high reflectivity so that light impinging the contoured surface is reflected therefrom. In the case of a transmission type grating, the contoured surface is provided with a low reflectivity and the substrate is formed of light transparent material so that light impinging the contoured surface is transmitted through the grating.

Thus, when a polychromatic incident light beam having a generally planar wavefront impinges on the contoured surface of the typical grating, a wavelet having a spherical wavefront is emitted from each of the grooves of the grating. As the wavelets travel away from the grating, they overlap and interfere with each other so as to provide a plurality of substantially monochromatic diffracted beams having wavelength dependent directions. Since the spectral bandwidth of the output beams is dependent on the number of grooves of the grating and since the contoured surface of the typical grating usually comprises a high density of grooves per unit length, the output beams are often provided with relatively narrow spectral bandwidths.

Mathematically, the dispersing characteristics of the diffraction grating are defined by the equation

$$s(\sin\theta_i \pm \sin\theta_m) = m\lambda \quad (1)$$

wherein s is the groove spacing of the grating, λ is the wavelength of the output beam, θ_i is the incident angle of the input beam with respect to a line normal to the plane of the grating, θ_m is the outgoing or diffraction angle of each output beam with respect to the line normal to the grating, m , otherwise known as the order of interference, can take any integer value, and wherein the plus sign applies to reflection-type gratings and the minus sign applies to transmission type gratings. Furthermore, the wavelength λ of the output beam is defined by the equation

$$\lambda = \frac{\lambda_f}{n_{\text{medium}}} \quad (2)$$

- 3 -

wherein λ_f , otherwise known as the free space wavelength, is the wavelength of the diffracted beam in a vacuum, and n_{medium} is the index of refraction of the medium in which the diffracted beam is traveling.

However, diffraction gratings known in the art often provide unstable dispersing characteristics that vary in response to a changing temperature. In particular, the groove spacing s is often affected by a change in temperature due primarily to the substrate of the grating having a non-zero coefficient of thermal expansion (CTE). Because the groove spacing is defined by the shape of the contoured surface and because the contoured layer is physically in contact with the substrate, the groove spacing s can change in response to expansion or contraction of the substrate. Since the groove spacing affects the dispersive characteristics of the grating according to equation (1), the dispersing characteristics of the typical diffraction grating may vary in a temperature dependent manner.

Another problem associated with typical diffraction gratings is that it is usually difficult to realize their theoretical maximum efficiency. In particular, the efficiency of a reflection-type grating is increased when the input and output beams are substantially aligned with each other. However, additional constraints imposed by the necessity of positioning additional elements adjacent the grating require the output beams to be angularly separated from the input beam with relatively large angles defined therebetween.

For example, in some configurations, a lens is often required to be positioned in the path of the input beam prior to the grating so as to collimate the input beam. Furthermore, spatial constraints may require the input lens to be positioned adjacent the grating. To prevent the input lens from distorting the output beams, the output beams are required to define relatively large angles with respect to the input beam. Consequently, the typical grating often provides less than optimal performance.

A prism is another type of dispersing device that is often used to extract narrow-band light beams from a polychromatic input beam. The typical prism utilizes non-parallel refracting input and output surfaces in conjunction with a transparent medium having a wavelength dependent index of refraction to provide the desired dispersing characteristics.

- 4 -

Light entering and exiting each refracting surface of the prism is refracted according to Snell's Law of refraction which can be expressed mathematically by the equation:

$$n_i \sin \theta_i = n_r \sin \theta_r \quad (3)$$

wherein n_i is the index of refraction of an incident medium, θ_i is the incident angle of the incident beam defined with respect to a line perpendicular to the refracting surface, n_r is the index of refraction of the refracting medium adjacent the incident medium, and θ_r is the refracted angle of the refracted beam. Because the index of refraction of the prism is dependent on the free space wavelength of light traveling therethrough, light exiting the output surface does so with a wavelength dependent direction. However, since the index of refraction of the typical prism usually varies with a change in temperature in a substantial manner, the dispersing characteristics of the prism are also relatively unstable and vary in response to a change in temperature.

Another type of dispersing device combines a diffraction grating and a prism so as to form what is otherwise known as a "grism". One advantage of the grism is that it provides convenient mounting surfaces for facilitating alignment of the grism within an optical system. Furthermore, as described in US Patent number 5,652,681 to Chen et al., the grism can be adapted to provide improved resolving power, such that the device is able to disperse finely spaced wavelength components with increased angular separation over a larger spectral range. However, because the groove spacing of the typical diffraction grating and the index of refraction of the typical prism are both adversely affected by a change in temperature, the dispersive characteristics of the typical grism are especially sensitive to a change in temperature.

From the foregoing, therefore, it will be appreciated that there is a need for an improved light dispersing device with dispersing characteristics that are more stable with respect to temperature. Furthermore, there is a need for a dispersing device with increased throughput efficiency.

- 5 -

Summary of the Invention

The aforementioned needs are satisfied by the present invention which, in one aspect, comprises a dispersing apparatus having an input face, a diffracting element, and an output face. The input face refracts light at angles which vary with temperature. The diffracting element compensates for these angular variations such that light exits the dispersing apparatus refracted at angles that are substantially independent of the angular variations of the input face.

In one embodiment, light entering the dispersing apparatus is a polychromatic light beam and said light exiting the dispersing apparatus is a plurality of narrow-band output light beams. The input and output faces are preferably formed by a prism, and said diffracting element preferably has a diffracting face. Furthermore, the diffracting element is preferably a diffraction grating juxtaposed with the prism.

In another aspect of the present invention, a light dispersing apparatus disperses a polychromatic input light beam into a plurality of narrow-band output light beams such that each output beam exits the dispersing apparatus with a wavelength dependent exit angle. The apparatus comprises a prism formed of a transparent medium having an index of refraction n_p . The prism has a mounting surface, an input surface for receiving the input beam, and an output surface for providing said output beam. The prism provides first dispersing characteristics that vary in response to a change in temperature. The apparatus further comprises a diffraction grating coupled to the mounting surface of the prism. The diffraction grating provides second dispersing characteristics that vary in response to a change in temperature. The variations in the first and second dispersing characteristics cooperate with each other so as to substantially reduce variations in the exit angle of each output beam in response to a change in temperature.

In a further aspect of the present invention, a dispersing apparatus comprises an input face for refracting said input light beam and a reflecting face for reflecting said input light beam subsequent to said refracting of the input light beam by the input face. The apparatus further comprises a diffracting face for diffracting said input light beam subsequent to said reflecting of the input light beam by the reflecting face. The diffracting

- 6 -

face provides at least one diffracted beam. The apparatus further comprises an output face for refracting the at least one diffracted beam so as to provide the at least one output light beam.

5 In one embodiment, the input light beam enters the diffracting face along a path that is substantially juxtaposed with the path of at least one diffracted beam exiting the diffracting face so as to increase the diffraction efficiency of the diffracting face. The input light beam entering the diffracting face partially overlaps the at least one diffracted beam exiting the diffracting face so as to increase the diffraction efficiency of the diffracting face. The reflecting of the input beam at the reflecting surface occurs as a result of the
10 input beam undergoing total internal reflection.

In yet another aspect of the present invention, a method comprises directing a beam of light through a medium along a first path to a diffracting element. The beam is then diffracted through the medium along a second path. After such diffracting, the beam is refracted into a different medium to direct the beam along a third beam path. The first and
15 second beam paths are then altered without substantially altering the third beam path. In one embodiment, the first and second beam paths are altered by changing the temperature of the medium.

Another aspect of the present invention is a method which comprises directing a beam of light through a medium along a first path to a reflecting surface. The beam is then
20 reflected for propagation through the medium along a second path that extends from the reflecting surface to a diffracting element. The beam is then diffracted for propagation through the medium along a third path. After such diffracting, the beam is refracted into a different medium to direct the beam along a fourth beam path.

In one embodiment, diffracting the beam through the medium along a third path
25 comprises diffracting the beam through the medium along a third path such that the third path is substantially juxtaposed with the second path. In one embodiment, the method further comprises altering the first, second, and third beam paths without substantially altering the fourth beam path. In one embodiment, altering the first, second, and third beam paths comprises changing the temperature of the medium.

- 7 -

From the foregoing, it should be apparent that the light dispersing apparatus of the preferred embodiments of the present invention provide improved dispersing characteristics. In particular, in one aspect of the invention, the light dispersing apparatus provides combined dispersing characteristics that remain substantially unchanged in response to a change in temperature. Furthermore, in another aspect of the invention, the light dispersing apparatus provides greater throughput efficiency. These and other objects and advantages of the present invention will become more apparent from the following description taken in conjunction with the accompanying drawings.

Brief Description of the Drawings

Figure 1 is a schematic diagram of one embodiment of a light dispersing device that is adapted to provide improved thermal compensation;

Figure 2 is schematic diagram illustrating a narrow-band input beam being redirected by the dispersing device of Figure 1 in a wavelength dependent manner;

Figure 3 is a schematic diagram of a light dispersing assembly comprising a pair of light dispersing devices that are similar to the light dispersing device of Figure 1;

Figure 4 is a schematic diagram of a light dispersing device that is adapted to provide improved throughput efficiency; and

Figure 5 is a schematic diagram of a light dispersing assembly comprising a pair of light dispersing devices that are similar to the light dispersing device of Figure 4.

Detailed Description of the Preferred Embodiment

Reference will now be made to the drawings wherein like numerals refer to like parts throughout. As will be discussed in greater detail below in connection with Figures 1 and 2, a light dispersing device 30 is provided with combined dispersing characteristics that are substantially independent of temperature. Furthermore, as will be discussed in connection with Figure 4, a light dispersing device 130 is provided with improved throughput efficiency.

Figure 1 illustrates the light dispersing device 30 in accordance with one aspect of the present invention. The device 30 comprises a diffraction grating 32 attached to a dispersive

- 8 -

mounting element 34. In one embodiment, the mounting element 34 is a prism 34. The device 30 is adapted to receive a polychromatic input beam 62 having a plurality of wavelength components at an input surface 52. In response to the input beam 30 entering the input surface 52, the device 30 provides a corresponding plurality of output beams 66 that have spectral bandwidths which are relatively narrow when compared to the combined spectral bandwidth of the input beam 62. In one embodiment, the output beams 66 are substantially monochromatic. The output beams 66 exit an output surface 54 of the device 30 with wavelength dependent exit angles ϕ_r . The grating 32 is adapted to provide the light dispersing device 30 with first dispersing characteristics and the prism 34 is adapted to provide the light dispersing device 30 with second dispersing characteristics so that the grating 32 and the prism 34 combine to provide the light dispersing device 30 with combined dispersing characteristics having improved thermal stability.

As shown in Figure 1, in one embodiment, the grating 32 of the light dispersing device 30 comprises a generally planar substrate 30 having a first broad surface 38 and a contoured layer 40 having a contoured surface 42 such that the contoured layer 40 extends from the surface 38 of the substrate 36. The contoured surfaces 42 includes a plurality of narrow grooves 44 which are illustrated in Figure 1 in an exaggerated manner. The grooves 44 are separated by a relatively small groove spacing s as measured along the plane of the substrate 36. The contoured surface 42 is formed with substantial reflectivity so that the grating 32 functions as a reflecting device.

In one embodiment, the grating 32 is formed using conventional replication techniques such that a mold derived from a master grating is used to imprint the replicated grating 32 with the contoured surface 42 having the plurality of parallel grooves 44. To avoid having the most intense interference maximum associated with the grating 32 be the zeroth-order for which there is no dispersion of light, the grating 32 is preferably blazed to the first order ($m=-1$). Consequently, the surface of each groove 44 is angled with respect to the plane of the substrate 36. However, it will be appreciated that other types of gratings could be used in other embodiments. For example, non-blazed gratings, holographic gratings, and transmission gratings could be used.

- 9 -

In the preferred embodiment, the diffraction grating 32 is adapted to diffract light in a manner consistent with that of conventional diffraction gratings so as to provide the light dispersing device 30 with the first dispersing characteristics. The diffraction grating 32 is adapted to redirect an input beam having a free space wavelength λ_f , i.e. the wavelength of the beam as measured in a vacuum, and an incident angle θ_i with respect to the plane of the diffraction grating so that each output beam is provided with a diffracted angle θ_m according to equation (1) discussed above. Since the grating is preferably blazed to the first order, the ratio of the diffracted light energy over the incident light energy, otherwise known as the diffraction efficiency, is enhanced for the $m=-1$ diffraction order.

As shown in Figure 1, the prism 34 of the light dispersing device 30 includes a plurality of generally planar refracting surfaces 50. The refracting surfaces 50 comprise the input surface 52, the output surface 54, and a mounting surface 56 such that an entrance angle α is defined by the input surface 52 and the mounting surface 56 and such that an exit angle γ is defined by the output surface 54 and the mounting surface 56. The input surface 52 of the prism 34 serves as an input port 60 for the light dispersing device 30 so as to enable the input polychromatic beam 62 to enter the light dispersing device therethrough. The output surface 54 of the prism 34 serves as an output port 64 for the light dispersing device 30 so as to enable the plurality of narrow-band output beams 66 to exit therefrom with wavelength dependent directions. The prism 34 is formed of a transparent material providing an index of refraction n_p that depends on the wavelength of light traveling therethrough.

As shown in Figure 1, in the preferred embodiment, the grating 32 is mounted directly to the mounting surface 56 of the prism 34 so as to provide the light dispersing device 30 with a diffracting face 58. The grating 32 is positioned adjacent the mounting surface 56 of the prism 34 so that the plane of the substrate 36 of the grating 32 is substantially parallel to the plane of the mounting surface 56 of the prism 34. The contoured surface 42 of the grating 32 is positioned adjacent the mounting surface 56 so that the contoured surface 42 is the diffracting face 58. A relatively thin layer of transparent epoxy 68 having a thickness T is interposed between the grating 32 and the prism 34 in a flush manner such that the epoxy 68

- 10 -

bonds to the contoured surface 42 of the grating 32 and the mounting surface 56 of the prism 34. The epoxy 68 is preferably formed with an index of refraction substantially equal to the index of refraction of the prism so as to prevent light from reflecting at the mounting surface 56.

Although the preferred embodiments of the light dispersing device 30 utilize the separately formed grating 32 which is mounted to the prism 34 as shown in Figure 1, it will be appreciated that, in another embodiment, an alternative diffracting face could be provided. For example, in one embodiment, the surface 56 of the prism 34 could be contoured in the manner of the contoured surface 42 of the grating 32 of Figure 1.

Reference will now be made to Figure 2 which illustrates the combined dispersing characteristics of the light dispersing device 30. In this simplified example, a narrow-band input beam 70, such as a monochromatic beam, having a freespace center wavelength λ_f is directed toward the input surface 52 of the light dispersing device 30. The input beam 70 is then redirected by the device 30 so that an output beam 72 with the same freespace center wavelength λ_f exits the output surface 54 of the device 30, thereby defining the exit angle ϕ , with respect to a line normal to the output surface 54.

As shown in Figure 2, the input beam 70 is directed through an incident medium 74, such as air, having an index of refraction n_i toward the input surface 52 of the prism 34 so as to define a first incident angle β_i with respect to a line normal to the input surface 52. Upon reaching the input surface 52, the input beam 70 undergoes refraction, thus providing a first refracted beam 76 according to the equation:

$$n_i \sin \beta_i = n_p \sin \beta_r \quad (4)$$

wherein β_r is the angle of refraction with respect to the line normal to the input surface 52.

As shown in Figure 2, the refracted beam 76 is directed through the prism 34 toward the grating 32 disposed along the mounting surface 56. The beam 76 approaches the mounting surface 56 so as to define a second incident angle θ_i with respect to a line normal to the plane of the mounting surface 56. The angle θ_i is related to β_r and the entrance angle of the prism, α , according to the geometric equation:

$$\theta_i = \alpha - \beta_r \quad (5)$$

- 11 -

As shown in Figure 2, the diffraction grating 32 diffracts the beam 76 into a diffracted beam 78 that reenters the prism 34 through the mounting surface 56. The diffracted beam 78 defines a diffraction angle θ_m with respect to a line normal to the mounting surface 56 according to the previously discussed diffraction grating equation, which in this situation is expressed as:

$$s(\sin\theta_i + \sin\theta_m) = \frac{-\lambda_f}{n_p} \quad (6)$$

As shown in Figure 2, the diffracted beam 78 travels through the prism 34 before exiting the output surface 54 of the prism 34, thus defining a third incident angle ϕ_i with respect to a line normal to the output surface 54. The angle ϕ_i is related to θ_m and the exit angle of the prism, γ , according to the geometric equation:

$$\phi_i = \gamma - \theta_m \quad (7)$$

The diffracted beam 78 undergoes refraction at the output surface 54, thus providing the output beam 72 according to the equation:

$$n_p \sin(\phi_i) = n_r \sin(\phi_r) \quad (8)$$

wherein n_r is the index of refraction of the medium adjacent the output surface 54 and outside the prism 34. In the preferred embodiment, the medium adjacent the output surface 54 is air.

According to equations (4)-(8), it is apparent that the exit angle ϕ_r depends on the first incident angle β_i , the index of refraction of the prism n_p , the input angle α of the prism, the groove spacing s of the grating, the exit angle γ of the prism, and the free space wavelength λ_r of the output beam. This explains why the polychromatic input beam of Figure 1 is dispersed into the corresponding plurality of narrow-band output beams each having a unique exit angle ϕ_r . However, since n_p and s often vary in response to a change in temperature, it is likely that the exit angles ϕ_r would vary in a substantial manner if not for the thermally compensating design features of the light dispersing device 30 which will now be described in greater detail.

To reduce the variance of the exit angles ϕ_r of the light dispersing device 30 in response to a change in temperature, in one embodiment, the light dispersing device 30 is adapted so that the effects of thermally induced changes in n_p are reduced by the effects of

- 12 -

thermally induced changes in s . More particularly, according to equations (4)-(8), the light dispersing device 30 is formed of materials selected so that the rate of change of the index of refraction of the prism 34 with respect to a change in temperature (dn/dT), and the rate of change of the groove spacings of the grating 32 with respect to a change in temperature (ds/dT) provide a relatively small rate of change of the exit angle ϕ_r with respect to a change in temperature ($d\phi_r/dT$).

For example, in one embodiment, the grating 32 is adapted to have desired values of ds/dT by applying temperature dependent stresses on the contoured layer 40. Such stresses may be the result of thermal expansion of the light dispersing device 30. More particularly, ds/dT of the contoured layer 40 can be selected by choosing the material of the contoured layer 40 with an appropriate coefficient of thermal expansion (CTE). The term ds/dT is further defined by the thermal stresses which act on the contoured layer 40. For example, since the contoured layer 40 is directly adhered to the substrate 36, the substrate 36 can be adapted to exert a thermal stress on the contoured layer 40 that depends on the CTE of the substrate 36. Since the contoured layer 40 is directly adhered to the epoxy 68, the epoxy 68 can be adapted to exert a thermal stress on the contoured layer that depends on the CTE of the epoxy. Additionally, since the prism 34 is adhered to the epoxy 68, the prism can be adapted to indirectly exert a thermal stress on the contoured layer 40 through the epoxy 68, wherein the thermal stress exerted on the contoured layer 40 depends on the elastic modulus of the epoxy 68, the thickness of the epoxy 68, and the CTE of the prism 38.

In one embodiment, the groove spacing s of the grating 32 is maintained at a relatively constant value in response to a change in temperature. This is accomplished by selecting the material of the substrate 36 with a relatively small CTE. In one embodiment, the epoxy 68 is formed of highly elastic material with a sufficient thickness so that the grating 32 is essentially isolated from the thermal expansion of the prism 34. The material of the prism 34 may be selected so as to have a relatively small CTE.

In one embodiment, the light dispersing device 30 is formed so that ds/dT of the grating 32 is substantially zero and so that dn/dT of the prism is substantially non-zero. To provide thermal compensation, the light dispersing device 30 is formed with appropriate

- 13 -

values of α , γ and n_p so that the effects of the substantially non-zero dn/dT on ϕ_r are substantially nullified according to equations (4)-(8). For example, if the index n_p of the prism increases, then the refracted angle β_r decreases according to equation (4) and the incident angle θ_i decreases according to equation (5). Correspondingly, the diffracted angle θ_m is enlarged according to equation (6) and the incident angle ϕ_i is reduced according to equation (7). The reduction in ϕ_i is selected so that the product of n_p times $\sin(\phi_i)$ is relatively unchanged so that ϕ_r is substantially maintained according to equation (8).

Thus, it will be appreciated that a person skilled in the art has substantial latitude in designing the light dispersing device 30 so that $d\phi_r/dT$ is reduced. In one embodiment, the material and shape of the light dispersing device is selected so that the effects of a non-zero ds/dT offset the effects of a non-zero dn/dT . In another embodiment, the light dispersing device is adapted with a substantially zero ds/dT and a substantially non-zero dn/dT such that ϕ_r is relatively unchanged by the changing n_p .

Thus, it will be appreciated that the light dispersing device 30 is able to disperse light in a manner that is more desirable than that of dispersing devices known in the art. By countering the effects of the thermally dependent index of refraction of the prism 34 with the effects of the thermally dependent groove spacings of the grating 32, the exit angles ϕ_r of the light dispersing device 30 are less sensitive to a change in temperature. Furthermore, in one embodiment, the light dispersing device 30 is adapted so that the groove spacing s of the grating 32 is relatively insensitive to a change in temperature and so that the index of refraction n_p of the grating 32 is substantially affected by a change in temperature. However, in this embodiment, the composition and shape of the prism 34 is selected so that the exit angles ϕ_r of the output beams 66 are substantially independent of the temperature of the light dispersing device 30.

Reference will now be made to Figure 3 which illustrates a light dispersing assembly 80 in accordance with another aspect of the present invention. The assembly 80 of Figure 3 comprises a plurality of light dispersing devices 82 that are each substantially similar to the light dispersing device 30 of Figure 1 such that the dispersing devices 82 share a single mounting element 84. In the preferred embodiment, the mounting element

- 14 -

84 of the dispersing assembly 80 is a prism 84 having first and second mounting surfaces 86, 88. The assembly 80 further comprises a first and second diffraction grating 90, 92 respectively mounted to the mounting surfaces 86, 88 of the prism 84 in the manner of the light dispersing device 30 of Figure 1 so as to provide matching first and second dispersing devices 82a, 82b. Furthermore, the dispersing assembly 80 is adapted so that a first and second input beam 94, 96 respectively impinging a first and second input surface 98, 100 of the assembly 80 are dispersed into a first and second plurality of output beams 102, 104. Moreover, by adapting the assembly 80 with the thermally compensating features of the device 30 of Figure 1, the output beams 102, 104 respectively exit a first and second output surface 106, 108 of the assembly 80 with wavelength dependent directions that are relatively unaffected by a change in temperature.

It will be appreciated that the assembly 80 provides many advantages. In particular, since the first and second diffraction gratings 90, 92 are fixedly mounted to the singular prism 84 during the manufacturing process, the gratings 90, 92 are maintained in a fixed alignment with respect to each other. Thus, when compared to dispersing devices that utilize a plurality of uncoupled diffraction gratings, the dispersing assembly 80 of Figure 3 is less likely to be affected by mechanical vibrations or by misguided attempts to realign the dispersing assembly 80. Furthermore, relatively precise alignment of the first and second gratings 90, 92 can be realized by simply aligning the prism 84 with the input beams 94, 96 such that the input beams 94, 96 enter the input surfaces 94, 96 of the prism 80 with desired incident angles. Consequently, the dispersing assembly 80 facilitates directing the output beams 102, 104 with relatively small directional errors.

Reference will now be made to Figure 4 which illustrates one embodiment of the light dispersing device 130 which is adapted to provide an improved throughput efficiency by reducing the angular separation between incident and diffracted beams entering and exiting a diffraction grating 132 of the dispersing device 130.

As shown in Figure 4, the device 130 is similar to the device 30 of Figure 1. In particular, the device comprises a prism 134 having an input surface 152, an output surface 154 and a mounting surface 156. The device 130 further comprises the diffraction grating

132 similar to that of Figure 1 so as to provide a diffracting face 136. In particular, the device 130 is mounted to the mounting surface 156 of the prism 134 such that an input light beam 162 impinging the input surface 152 of the prism 134 is subsequently diffracted by the diffraction grating 132 so as to provide at least one output beam 166 that exits the output surface 154. Furthermore, the device 130 is adapted with the thermally compensating features described previously in connection with the device 30 of Figure 1 so as to provide substantially uniform dispersing characteristics in response to a change in temperature. However, as will be described in greater detail below, the device 130 defines input and output beam paths 146, 148 within the prism 134 such that improved diffraction efficiency of the grating 132 is realized.

As shown in Figure 4, the prism 134 is adapted so that the input light beam 162 entering the input surface 152 of the prism 134 travels within the prism 134 from the input surface 152 to the mounting surface 156 along the input beam path 146. In particular, the input beam path 146 comprises a first length 210 that extends toward a reflecting location 211 positioned within the prism 134. The input beam path 146 further comprises a second length 212 that extends from the reflecting location 211 toward the diffracting face 136 so that the input beam 146 defines an incident angle θ_i with respect to a line normal to the diffracting face 136.

In one embodiment, reflection of the input beam 162 at the reflecting location 211 occurs as a result of total internal reflection (TIR). In particular, the first length 210 of the input beam path extends toward a first exterior surface 218 of the prism 134 and defines an incident angle κ_i with respect to a line normal to the first surface 218. The prism 134 is adapted so that the incident angle κ_i is greater than the critical angle at the first surface 218 defined by:

$$\sin^{-1} (n_p/n_{out})$$

wherein n_{out} is the index of refraction of the medium outside the prism 134 adjacent the first surface 218 and wherein n_p is the index of refraction of the prism 134.

As shown in Figure 4, the first length 210 of the input beam path 146 extends from the input surface 152 to the output surface 154. Upon reaching the output surface 154, the

- 16 -

input beam 162 undergoes TIR thereat so as to be redirected along the second length 212 of the input beam path 146 that extends from the output surface 154 toward the mounting surface 156.

The prism 132 is adapted so that the output beam 166 originating at the diffracting face 136 travels within the prism 134 from the diffracting face 136 to the output surface 154 along the output beam path 148. The output beam path 148 comprises a first length 214 that extends from the mounting surface to the output surface 154 along a direction defined by the diffraction angle θ_m with respect to the diffracting face 136 according to equation (6). The first length 214 of the output beam path 148 further defines an incident angle ϕ_i with respect to the output surface 154. The incident angle ϕ_i defined by the output beam path at the output surface is less than the critical angle so that TIR does not occur. In one embodiment, an anti-reflective coating is deposited along the output surface 154 of the prism 132 so as to enhance transmission of the output beam 166 through the output surface 154 without frustrating the TIR of the input beam 162.

The device 130 is adapted so that the second length 212 of the input beam path 146 and the first length 214 of the output beam path 148 define an angle Ω which is relatively small. In one embodiment, Ω is less than 5 degrees. Since the angle Ω is smaller than that which is typically provided by prior art devices, the diffraction grating 132 is able to realize an improved diffraction efficiency. Furthermore, since the input and output beams 162, 166 respectively enter and exit the device through the spatially separated input and output surfaces, 152, 154 the beams are less likely to be affected by closely positioned components.

For example, in one embodiment, a lens 216 is positioned adjacent the input surface 152 of the device 130 so as to be positioned in the path of the input beam 162 as shown in Figure 4. However, since the output beam 166 exits the output surface 154 and travels therefrom along a region which is substantially separated from the input surface 152, the output beam 166 does not enter the lens 216. Consequently, the output beam 166 is not affected by the lens 216.

- 17 -

In one embodiment, the device 130 is adapted so that the input and output beams 162 and 166 having ellipsoidal cross sectional shapes partially overlap each other at the output surface 154 of the prism 134. Because the input beam 162 has an extended width, the input beam 162 strikes the output surface 154 along a first incident region 220 having a width W_1 . Likewise, because the output beam 166 has an extended width, the output beam 166 strikes the output surface 154 along a second incident region 222 having a width W_2 . Since the angle Ω between the input and output beams 162 and 166 is relatively small, the second incident region partially overlaps the first incident region as shown in Figure 4.

Thus, it will be appreciated that the light dispersing device 130 of Figure 4 provides the advantage of increased throughput efficiency. This advantage is realized by providing the input and output beam paths 146, 148 that define a relatively small angle Ω at the diffracting face 136 which increases the diffraction efficiency of the grating 132. For example, it has been determined that the diffraction efficiency of the diffraction grating 132 can increase by as much as 10% if the angle Ω is reduced from 15° down to 5° . Furthermore, this advantage is realized without requiring the input and output beams 162, 166 to pass nearby each other outside of the prism. Consequently, the device can be used in conjunction with an additional optical element such that the additional element can be adapted to influence one of the beams without influencing the other.

Reference will now be made to Figure 5 which illustrates one embodiment of a light dispersing assembly 180 which comprises a plurality of light dispersing devices 182 that are each substantially similar to the light dispersing device 130 of Figure 4. In one embodiment, the assembly comprises a single prism 234 and a single diffraction grating 232 adapted so as to provide separate diffracting faces 242 and 243.

Thus, the assembly 180 provides the advantages of the device 30 of Figure 1, the assembly 80 of Figure 2, and the device 130 of Figure 3. In particular, the assembly 180 provides improved thermal stability and improved diffraction efficiency. Furthermore, since the dispersing devices 182 share the same prism 234, the dispersing devices 182 of the assembly 180 can be aligned with each other in a more reliable manner. Moreover, since all of the elements of the assembly 180 are rigidly attached together, the assembly

- 18 -

180 is less likely to become misaligned during use. Additionally, since the assembly 180 includes the singular grating 232, alignment between the dispersing devices 182 of the assembly 180 is further simplified, thus enabling the assembly 180 to be manufactured at a reduced cost.

5 Although the preferred embodiments of the present invention has shown, described and pointed out the fundamental novel features of the invention as applied to these embodiments, it will be understood that various omissions, substitutions and changes in the form of the detail of the device illustrated may be made by those skilled in the art without departing from the spirit of the present invention. Consequently, the scope of the invention
10 should not be limited to the foregoing description, but should be defined by the appending claims.

WHAT IS CLAIMED IS:

1. A dispersing apparatus for dispersing light, the apparatus comprising:
an input face which refracts said light at angles which vary with
temperature;

5 a diffracting element; and

an output face which refracts said light, said diffracting element
compensating for said angular variations at said input face such that said light exits
the dispersing apparatus refracted at angles which are substantially independent of
said angular variations.

10 2. The apparatus of Claim 1, wherein said light entering the dispersing
apparatus is a polychromatic light beam and wherein said light exiting the dispersing
apparatus is a plurality of narrow-band output light beams.

3. The apparatus of Claim 1, wherein said diffraction element comprises a
diffracting face.

15 4. The apparatus of Claim 1, wherein said input and output faces are formed
by a prism, and wherein said diffracting element is a diffraction grating juxtaposed with the
prism.

5. The apparatus of Claim 4, wherein said diffraction grating is a reflection
diffraction grating.

20 6. The apparatus of Claim 5, wherein said diffraction grating is fixedly
mounted to said prism.

7. A light dispersing apparatus for dispersing a polychromatic input light beam
into a plurality of narrow-band output light beams such that each output beam exits the
dispersing apparatus with a wavelength dependent exit angle, the apparatus comprising:

25 a prism formed of a transparent medium having an index of refraction n_p ,
said prism comprising a mounting surface, an input surface which receives said
input beam, and an output surface which outputs said output beam, said prism
providing first dispersing characteristics that vary in response to a change in
temperature; and

- 20 -

a diffraction grating coupled to the mounting surface of the prism, said diffraction grating providing second dispersing characteristics that vary in response to a change in temperature, wherein said variations in the first and second dispersing characteristics cooperate with each other so as to substantially reduce variations in the exit angle of each output beam in response to a change in temperature.

8. The apparatus of Claim 7, wherein the second dispersing characteristics are defined by n_p .

9. The apparatus of Claim 8, wherein the diffraction grating comprises a substrate having a surface, said diffraction grating further comprising a contoured layer disposed along the surface of the substrate.

10. The apparatus of Claim 9, wherein the contoured layer is blazed.

11. The apparatus of Claim 9, wherein the second dispersing characteristics are further defined by the shape of said contoured layer.

12. The apparatus of Claim 11, wherein said contoured layer experiences a change in shape in response to a change in temperature.

13. The apparatus of Claim 12, wherein said contoured layer is exposed to at least one temperature dependent stress.

14. The apparatus of Claim 13, wherein the at least one temperature dependent stress comprises a first stress applied by the substrate of the diffraction grating.

15. The apparatus of Claim 14, wherein the at least one temperature dependent stress further comprises a second stress applied by the prism.

16. The apparatus of Claim 15, further comprising a layer of epoxy interposed between the prism and the contoured layer of the diffraction grating in a substantially flush manner so that the second stress applied by the prism onto the contoured layer is applied indirectly through the layer of epoxy.

17. The apparatus of Claim 16, wherein the layer of epoxy is adapted so as to reduce the second stress.

18. The apparatus of Claim 8, wherein n_p varies with temperature.

- 21 -

19. The apparatus of Claim 18, wherein the shape of the contoured layer is substantially maintained in response to a change in temperature.

20. A dispersing apparatus for dispersing an input light beam into at least one output light beam, the apparatus comprising:

- 5 an input face for refracting said input light beam;
 a reflecting face for reflecting said input light beam subsequent to said refracting of the input light beam by the input face;
 a diffracting face for diffracting said input light beam subsequent to said reflecting of the input light beam by the reflecting face, said diffracting face
10 providing at least one diffracted beam; and
 an output face for refracting the at least one diffracted beam so as to provide the at least one output light beam.

21. The apparatus of Claim 20, wherein said input light beam enters the diffracting face along a path that is substantially aligned with the path of at least one
15 diffracted beam exiting the diffracting face so as to increase the diffraction efficiency of the diffracting face.

22. The apparatus of Claim 21, wherein said input light beam entering the diffracting face and the at least one diffracted beam exiting the diffracting face define an angle of less than five degrees.

20 23. The apparatus of Claim 20, wherein said input light beam entering the diffracting face partially overlaps the at least one diffracted beam exiting the diffracting face so as to increase the diffraction efficiency of the diffracting face.

24. The apparatus of Claim 20, wherein said reflecting of the input beam at the reflecting surface occurs as a result of the input beam undergoing total internal reflection.

25 25. The apparatus of Claim 24, wherein said reflecting surface comprises the output surface.

26. The apparatus of Claim 25, wherein the light dispersing device further comprises an antireflective coating disposed along the output surface, said coating not inhibiting the input light beam entering the reflecting surface from undergoing total

- 22 -

internal reflection, said coating substantially inhibiting the at least one diffracted beam from reflecting at the output surface.

27. A method comprising:

directing a beam of light through a medium along a first path to a diffracting
5 element;

after said directing, diffracting the beam through the medium along a second
path;

after said diffracting, refracting the beam into a different medium to direct
the beam along a third beam path; and

10 altering the first and second beam paths without substantially altering the
third beam path.

28. The method of Claim 27, wherein altering the first and second beam paths
without substantially altering the third beam path comprises changing the temperature of
the medium.

15 29. A method comprising:

directing a beam of light through a medium along a first path to a reflecting
surface;

after said directing, reflecting the beam through the medium along a second
path that extends from the reflecting surface to a diffracting element;

20 after said directing, diffracting the beam through the medium along a third
path; and

after said diffracting, refracting the beam into a different medium to direct
the beam along a fourth beam path.

30. The method of Claim 29, wherein diffracting the beam through the medium
25 along a third path comprises diffracting the beam through the medium along a third path
such that the third path is substantially juxtaposed with the second path.

31. The method of Claim 30, further comprising altering the first, second, and
third beam paths without substantially altering the fourth beam path.

- 23 -

32. The method of Claim 31, wherein altering the first, second, and third beam paths without substantially altering the fourth beam path comprises changing the temperature of the medium.

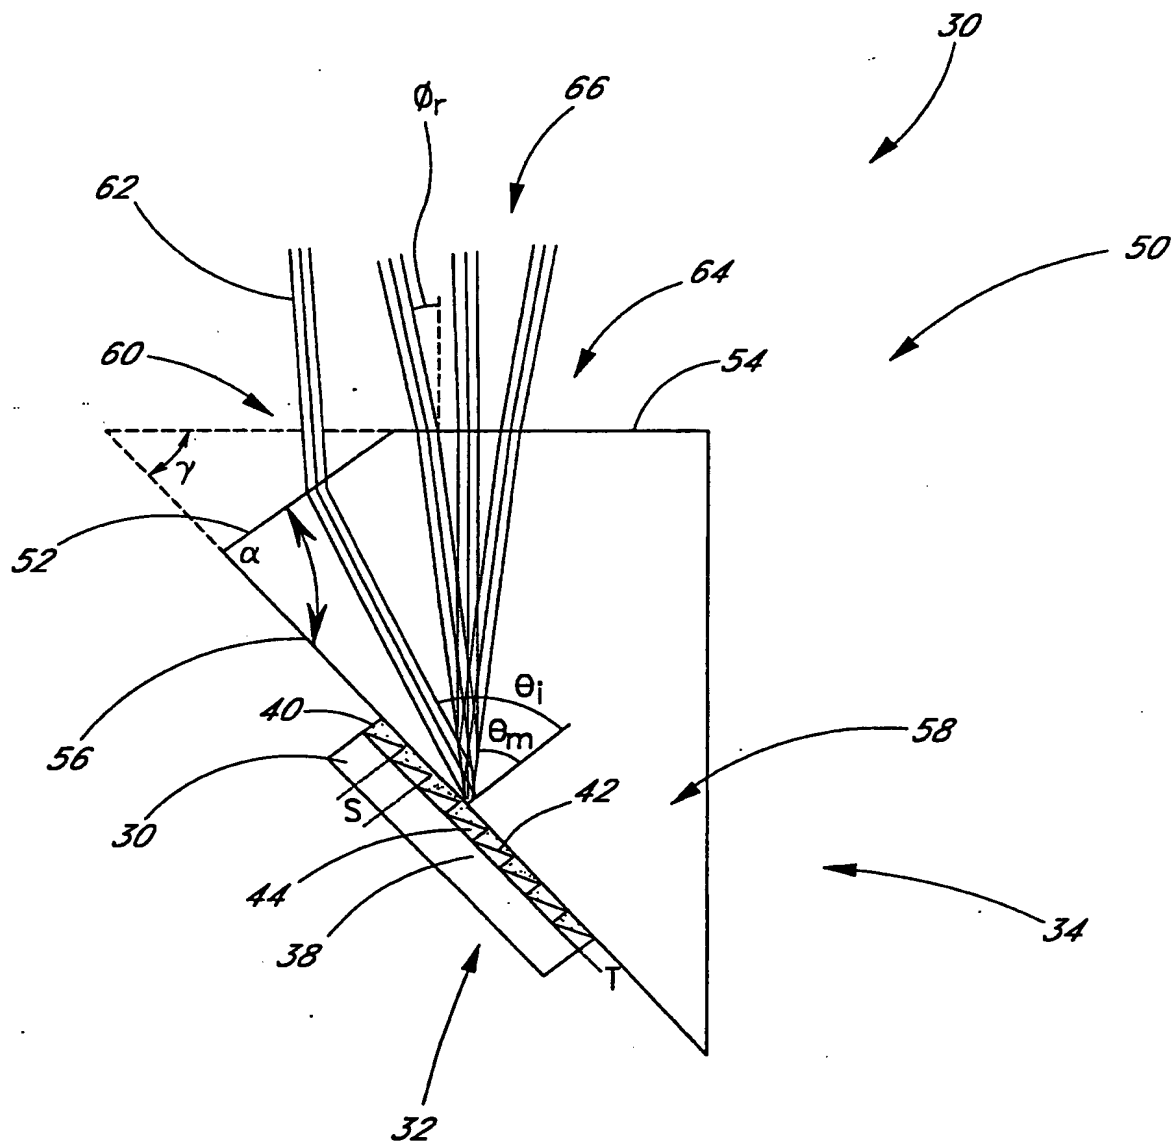


FIG. 1

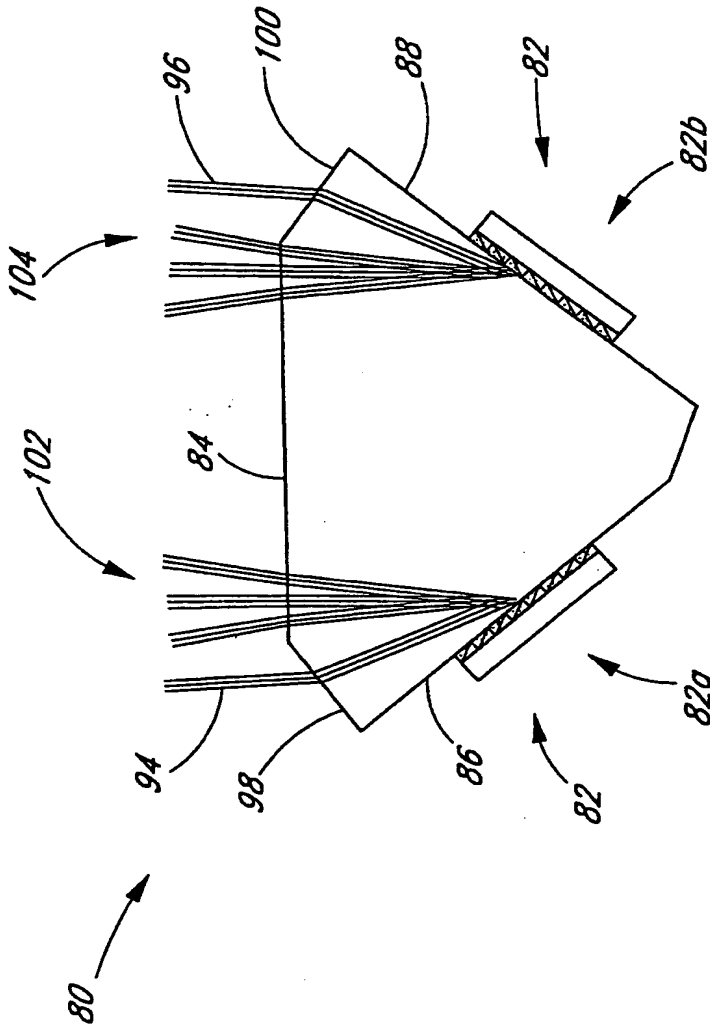
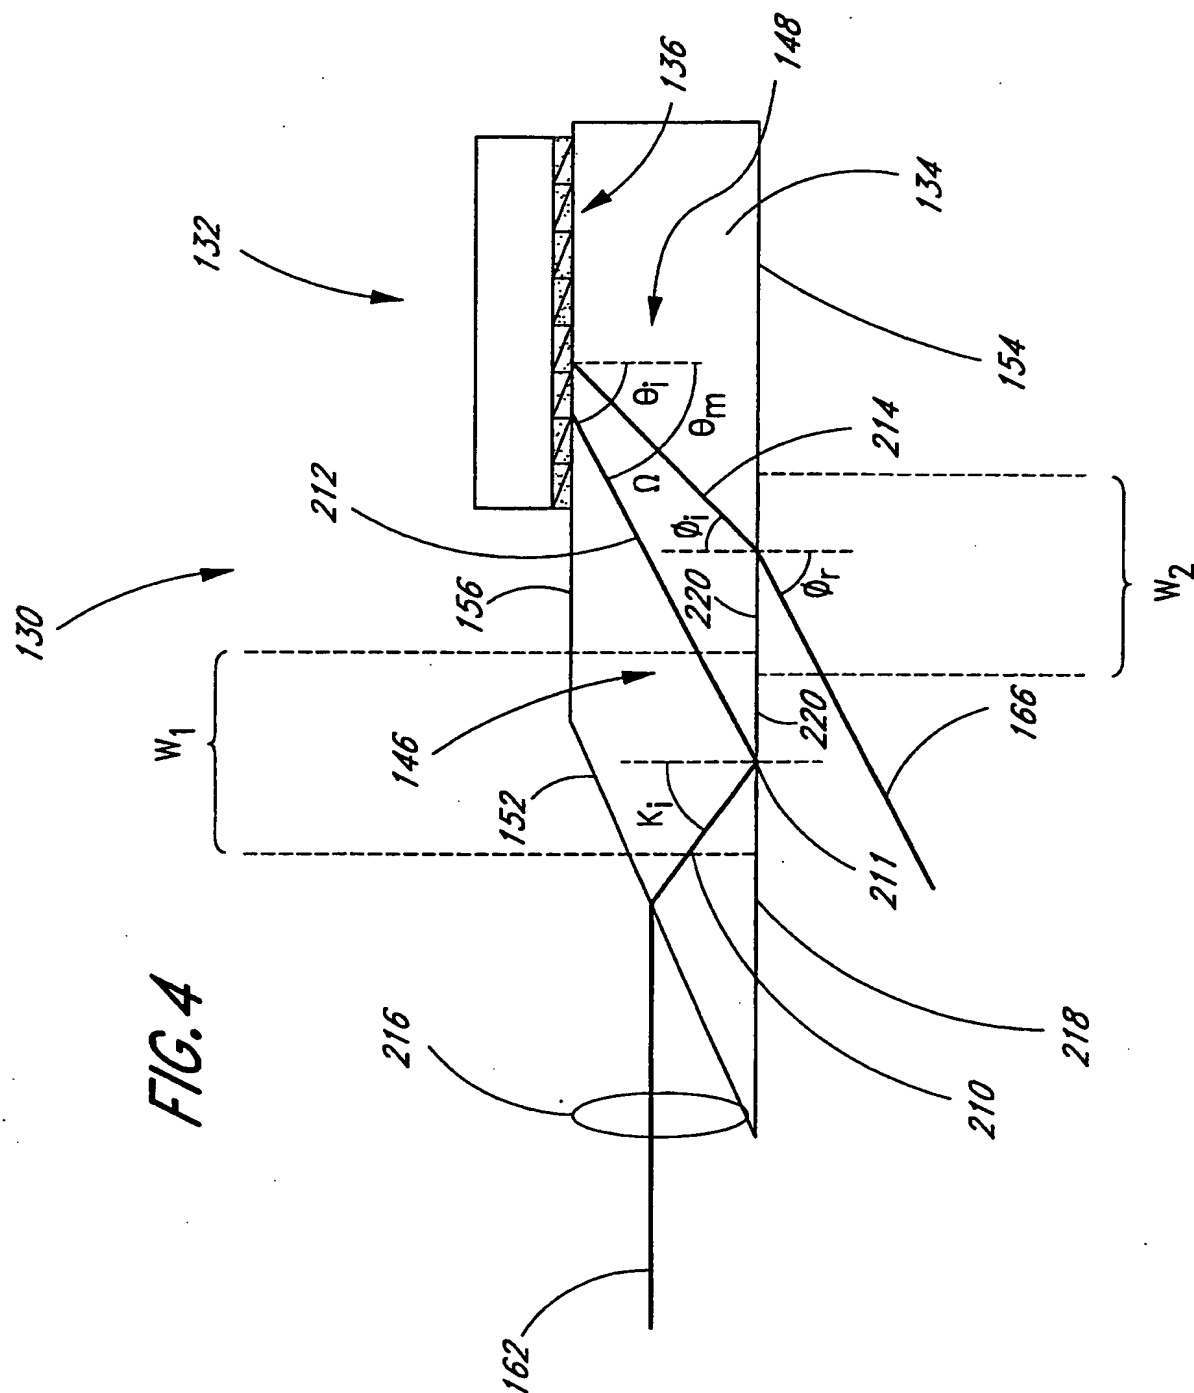


FIG. 3

4/5



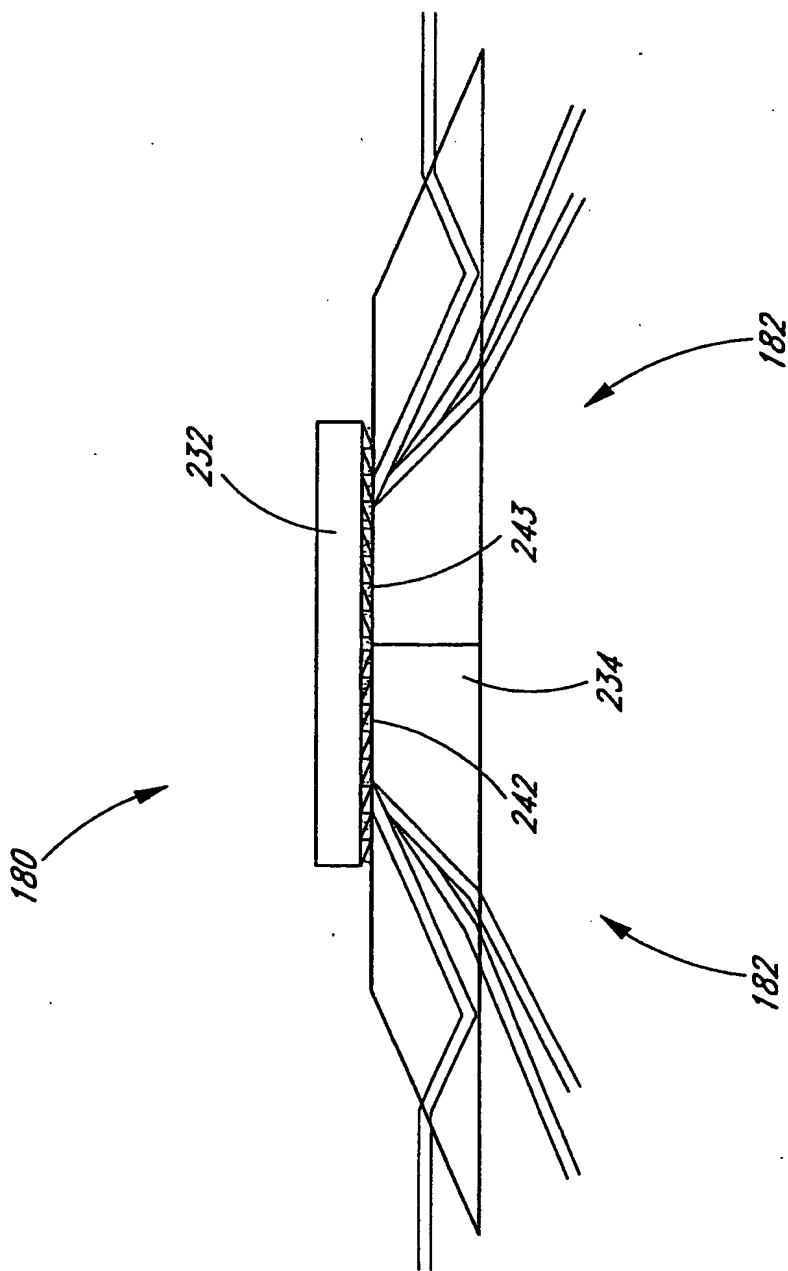


FIG. 5